



SILVER


21067

12 face V2 RATE

Size: 600X600mm

Outdoor / Indoor P4 RATE

Technical characteristics

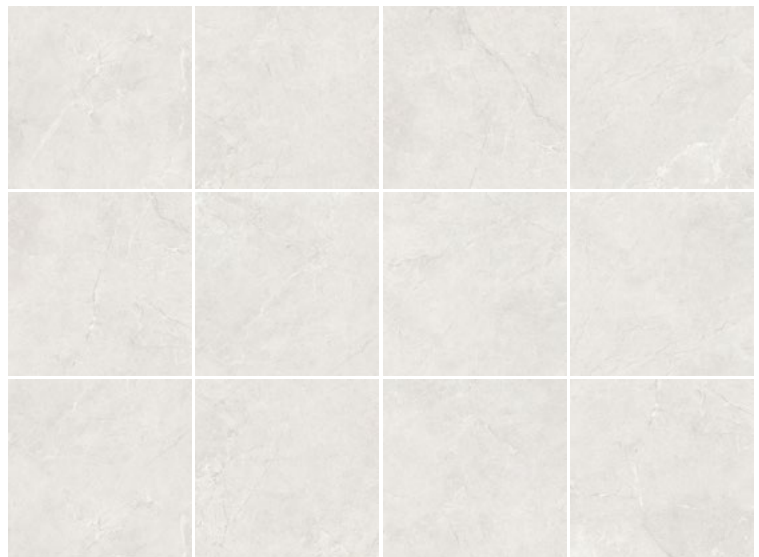



BEIGE

21068

12 face V2 RATE

Size: 600X600mm

Outdoor / Indoor P4 RATE

Technical characteristics





GRIGIO

21069

12 face V2 RATE

Size: 600X600mm

Outdoor / Indoor P4 RATE

Technical characteristics





CINDER

21070

12 face V2 RATE

Size: 600X600mm

Outdoor / Indoor P4 RATE

Technical characteristics



规格 (厘米) FORMZT(cm/in)	片 / 箱 PCS/BOX	平方 / 箱 SMQ/BOX	千克 / 箱 KG/BOX	箱 / 托 BOX/PALLET	平方 / 托 SMQ/PALLET	千克 / 托 KG/PALLET
600x600x9.5mm	4	1.44	30KG	40	57.6	1200

		测试方法 TEST METHODS	国际标准 INTERNATIONAL STANDARDS	行知产品性能 XINGZHI VALUE
	长度偏差 LENGTH	GB/T 3810.2-2016	±0.6%,±0.2mm	±0.1%,±1.0mm
	宽度偏差 WIDTH	GB/T 3810.2-2016	±0.6%,±0.2mm	±0.1%,±1.0mm
	厚度偏差 THICKNESS	GB/T 3810.2-2016	±5%,±0.5mm	±1%,±0.3mm
	表面平整度 SURFACE ROUGHNESS	GB/T 3810.2-2016	±0.5%,±2.0mm	±0.5%,±2.0mm
	边角度 STRAIGHTNESS OF SIDES	GB/T 3810.2-2016	±0.5%,±1.5mm	±0.02%,±0.1mm
	直角度 RECTANGULARITY	GB/T 3810.2-2016	±0.5%,±2.0mm	±0.1%,±1.0mm
	吸水率 WATER ABSORPTION	GB/T 3810.2-2016	Ebs ≥ 0.5%	Ebs ≥ 0.5%
	破坏强度 BREAKING STRENGTH	GB/T 3810.2-2016	≥ 1300N	≥ 1300N
	断裂模数 MODULUS OF RUPTURE	GB/T 3810.2-2016	平均值 ≥ 35 Minimum35 单个值 ≥ 32 Individuai Minimum35	平均值 ≥ 35 Minimum35 单个值 ≥ 32 Individuai Minimum35
	抗污性 STAIN RESISTANCE	GB/T 3810.2-2016	最低 3 级 Minimum Class 3	5 级 Class 5
	耐磨性 ABRASION RESISTANCE	GB/T 3810.2-2016	报告耐磨级别 Report abrasion class 报告耐磨转数 Report cycles passed	4 级 Class 4 1500
	抗冻性 FREEZING RESISTANCE	GB/T 3810.2-2016	应通过此测试 Required	Pass
	抗釉裂性 CEAZING RESISTANCE	GB/T 3810.2-2016	应通过此测试 Required	Pass
	防滑性 SLIP RESISTANCE	DIN 51130	Prom R9 to R11 Da R9 a R11	Matt R10-R11
		DIN 51097	Class A,B and C	Matt Class B
		ANSIA137.1-2012	Matt p ≥ 0.42	Matt p ≥ 0.55
		AS4586:2013AppendlxA	P0-P5	Matt P4
		GB/T4100:2015AppendlxA	P ≥ 0.5	Static frictcion coefficient of floor tile ≥ 0.5