

90+ | 素色肌肤砖



Traver Land



90+ | 素色肌肤砖

广东省佛山市禅城区里宝西路60号  
欧洲工业园二座三层自编之C区  
C Area, Level 3, Building 2, European Industrial Park,  
No.60, West Langbao Road, Foshan City,  
Guangdong Province, P.R.China

90+



Karst cave series has clear stripes and natural holes restored by the mold, creates a full sense of three-dimensional. It can achieve P3 anti-slip rate, making the tile surface safer.

It is made of environment-friendly materials, with four colors available. One stone has different patterns and various textures, bringing rich visual experience. It is not only suitable for paving at home, but also can be used in various commercial places and public places.

OFF-WHITE

**60TL20R**  
600x600mm  
**612TL20URD**  
600x1200mm

SILVER GREY

**60TL21R**  
600x600mm  
**612TL21URD**  
600x1200mm

IVORY

**60TL22R**  
600x600mm  
**612TL22URD**  
600x1200mm



The bright off white is pure and clean, with different hole textures and overlapping textures, bringing the natural landscape into the space.

OFF-WHITE

**60TL20R**  
600x600mm  
**612TL20URD**  
600x1200mm



WALL:612TL20URD  
FLOOR:60TL20R



WALL:36TL20R  
FLOOR:60TL20R



The silver grey color has a mysterious temperament, which shows its dignity in the space. You can feel the beauty of nature without leaving home.

SILVER GREY

**60TL21R**  
600x600mm  
**612TL21URD**  
600x1200mm



FLOOR:60TL21R



WALL:36TL21R  
FLOOR:60TL21R



Ivory color brings a warm feeling to people. Every detail is perfect. The texture of the cave stone is perfectly reproduced, bringing both visual and tactile enjoyment.

IVORY

**60TL22R**  
600x600mm  
**612TL22URD**  
600x1200mm



FLOOR:612TL22URD





PRODUCT FEATURE



SURFACE




APPLICATION




INSTALLATION GUIDANCE




COLOURS




Off-white  
60TL20R  
600x600mm




Silver Grey  
60TL21R  
600x600mm



Ivory  
60TL22R  
600x600mm

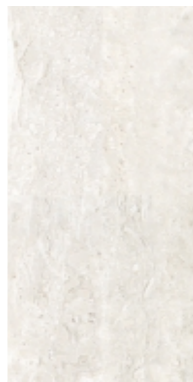

Off-white  
612TL20URD  
600x1200mm

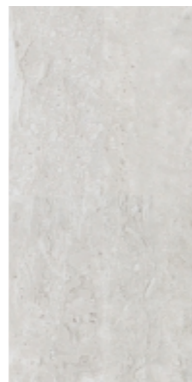


Silver Grey  
612TL21URD  
600x1200mm



Ivory  
612TL22URD  
600x1200mm

PRODUCT FEATURE / SURFACE APPLICATION / INSTALLATION GUIDANCE

V4 TEXTURE RATING	MIN. LAYING GAP 3mm	RECTIFIED	R STRUCTURE	WALL TILES	FLOOR TILES	04 COLOURS	02 SIZES	01 SURFACES
----------------------	---------------------	-----------	----------------	------------	-------------	---------------	-------------	----------------

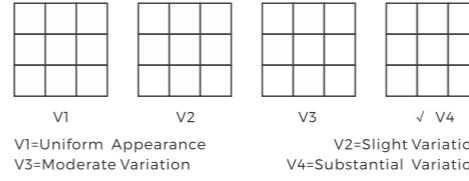

TECHNICAL SPECIFICATION

Dimensions & Surface Quality			
Length and Width	±0.6% max.	-0.03-0.03%	-0.03-0.03%
Thickness	±5% max.	9.0-9.5mm	11.0-11.5mm
Orthogonality	±0.5% max.	-0.06-0.07%	-0.06-0.07%
Straightness of sides	±0.5% max.	-0.06-0.07%	-0.02-0.03%
Surfaces flatness	±0.5% max.	-0.05-0.07%	-0.09-0.11%
Physical Properties			
Water absorption	≤0.5%	≤0.5%	≤0.5%
Breaking strength	≥1300N	2265N	4031N
Bending resistance	≥35N/mm <sup>2</sup>	38N/mm <sup>2</sup>	40N/mm <sup>2</sup>
Resistance to deep abrasion	≤175mm <sup>3</sup>	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	R9-R11	R11	R11
Colour resistance to light	no colour changes	no colour changes	no colour changes
Chemical Properties			
Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	≥3	Class 5	Class 5

PACKING DETAILS

600x600mm	✓	RD	4	1.44	31.5
600x1200mm		✓	2	1.44	43